




CHARACTERISTIC OF VALVE REGULATED GEL BATTERY

MODEL: UTX14-BS(GEL)


NO.: 301040035-00079

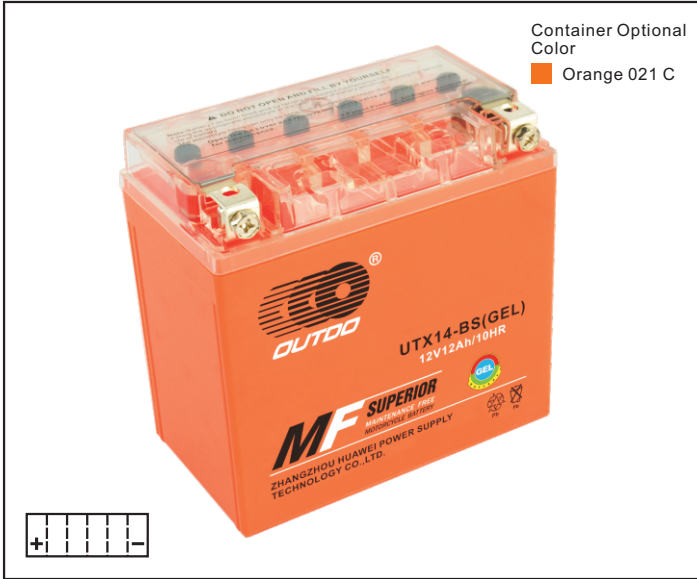

Container Optional Color
■ Orange 021 C

Plane Chart:

Unit:(mm) Terminal type:(Z1)

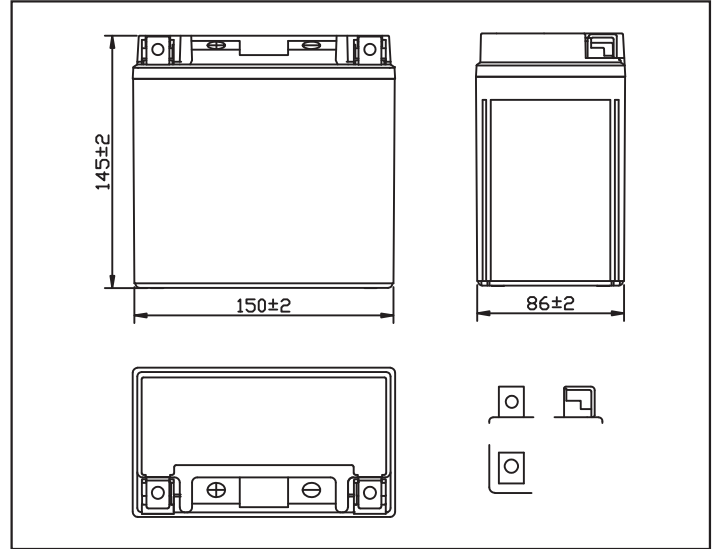

Parts:


Executed Standard : JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Gel	Safy Valve	Seal Glue
ABS	ABS	Cu	PbO ₂	Pb	AGM	dilute sulphuric acid	Fumed Silica	Rubber	Epoxy Resin


Parameter Chart:

Volts	12V	
Capacity (25°C)	10 hours rate	12Ah
Appx.Dimension (mm)	L±2	150
	W±2	86
	H±2	145
Storage Status	Wet	
Weight (Approx)	4.4Kg	
Retention of Charge Storage @25 °C		
1 month	97%	Directly Mounted
3 month	90%	Directly Mounted
6 month	80%	Constant Volts:14.4V Limit Current:2.4A Charging Hours:2-3H
12 month	40%	Constant Volts:14.4V Limit Current:2.4A Charging Hours:4-6H
CCA	Factory Standard (-10°C)	Factory Standard (-18°C)
Discharging Current	100A	150A

Discharge Current 25°C

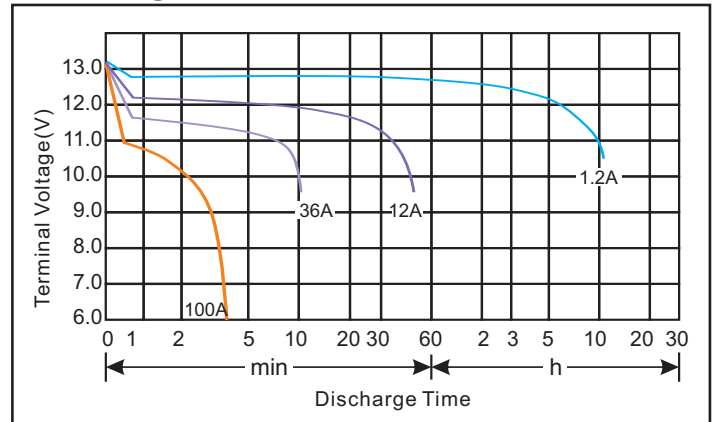

Residual Capacity

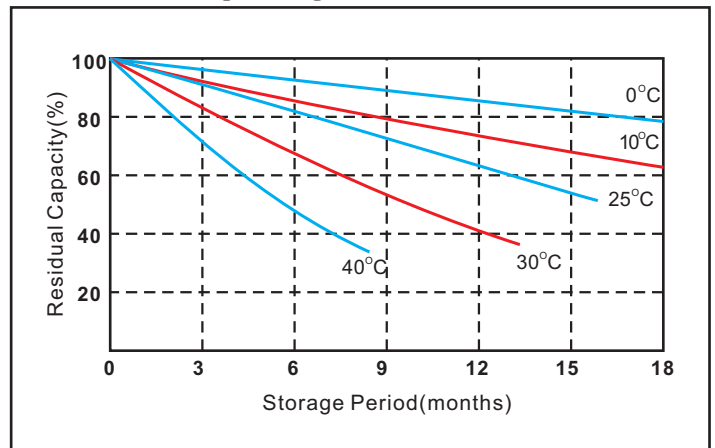

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.